


OR-H 47, CH 48

Manual tensioning and sealing for flat packages



- Easy, lightweight, fast
- For mobile applications

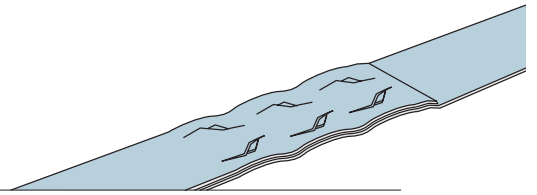

OR-H 47
Easy, light, fast – for use in various industries

- One of the lightest tools for its performance class
- Fast and easy strap inserting
- Tensioning and sealing with little effort
- User-friendly: ergonomic design, well-balanced weight
- Maintenance-friendly design: easy access, few parts
- Wear parts easy to replace (user by itself)



CH 48
For heavy-duty applications



Technical data	OR-H 47	CH 48
Weight, kg (lbs)	3.5 (7.7)	5.1 (11.2)
Tension force, up to approx. N	6500	6000
Steel strap		
Width, mm (inch)	13, 16, 19 (1/2, 5/8, 3/4)	19 (3/4)
Standard quality:		
– Strap thickness, mm (inch)	0.38–0.63 (.015–.025)	0.60–0.80 (.023–.031)
– Tensile strength, up to approx. N/mm ² (lbs/sq. inch)	850 (120 000)	850 (120 000)
High tensile quality:		
– Strap thickness, mm (inch)	0.38–0.63 (.015–.025)	0.60–0.80 (.023–.031)
– Tensile strength, up to approx. N/mm ² (lbs/sq. inch)	1100 (157 000)	1100 (157 000)

ORGAPACK solutions

Hand tools for different applications

		Steel strap	Packages		
			Shape	Medium	Heavy
Sealless  OR-H 47  CH 48  OR-H 20 A  OR-H 21 A	13–19 mm $\frac{1}{2}$ – $\frac{3}{4}$ "	Flat	[Orange bar with gradient]		
	19 mm $\frac{3}{4}$ "	Flat	[Orange bar with gradient]		
	13–16 mm $\frac{1}{2}$ – $\frac{5}{8}$ "	Flat	[Orange bar with gradient]		
	16–19 mm $\frac{5}{8}$ – $\frac{3}{4}$ "	Flat	[Orange bar with gradient]		
Sealing with seal  CR 25 A  CR 24 A  CR 26 A  CR 208 P  OR-V 40 P  OR-V 41 P	13–19 mm $\frac{1}{2}$ – $\frac{3}{4}$ "	Round	[Orange bar with gradient]		
	19 mm $\frac{3}{4}$ "	Round	[Orange bar with gradient]		
	25–32 mm 1– $\frac{1}{4}$ "	Round	[Orange bar with gradient]		
	19–32 mm $\frac{3}{4}$ –1 $\frac{1}{4}$ "	Round	[Orange bar with gradient]		
	19–32 mm $\frac{3}{4}$ –1 $\frac{1}{4}$ "	Round	[Orange bar with gradient]		